



DX 970 NIEUWKOOP



DX Digital hot wire anemometer probe (directional)



- Interchangeable DX sensor
- Low power consumption
- Wide measuring range 0.4 ... 20 m/s
- Fast: T90 < 1.5 s
- Integrated temperature channel
- Temperature compensated 0 -50°C
- for PRO Line meters PRO D01/D05/925/595
- Optional DAkkS/ACCREDIA certificates
-

DESCRIPTION

DX 970 are compact and reliable hot-wire anemometers, ideal for measuring air velocities in exhaust systems and ventilation ducts.

The small diameter of Ø 12 mm allows measurement in correspondingly small measuring openings.

The measurement is direction-dependent, the direction is easily recognizable by the sensor construction.

They are designed for use with PRO D01/D05/925/595 handheld measuring devices and can therefore be easily combined with any other sensors, such as the DX 310 air humidity sensors or DX 330 air quality sensors.


The measurement is temperature compensated over a wide range for enhanced accuracy.

The probes are supplied factory-calibrated, and they are ready to use.

They can be optionally supplied with an ISO 9001 factory calibration or EN ISO/IEC 17025 ACCREDIA calibration certificate.

The calibration data are stored in the probe, allowing for interchangeability without the need for recalibration.

Equipped with 5-pin M12 connector "DX-Sensor standard", connectable to PRO-D0x and PRO 925/595 multifunctional meters.

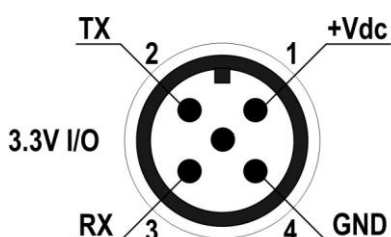


M12 DX 970 sensor pin out
(a connection-cable is required)



NIEUWKOOP

TECHNICAL SPECIFICATIONS

Sensor type	Hot film anemometer sensor, directional
Measuring range	0.40 ... 20.00 m/s 0.00 ... +50.00 °C
Resolution	0.01 m/s 0.01°C
Measuring rate	1 /s
Accuracy	±(0.2 m/s + 3 % of measured value) ±1 °C (0...+50 °C)
Response time T90	≤1.5 s
Operating conditions	0 ... +50 °C
Storage temperature	-20 ... +60 °C
Output	DX-Sensor interface M12
Connection (to meter)	5-pole M12
Power consumption	typ. 25 mA @ 0 m/s typ. 45 mA @ 20 m/s
Dimensions	length 357 mm probe tube Ø12 mm 228 mm
Weight	130 g without cable
Material	Handle: ABS, TPU Probe: PC
Protection degree	IP40

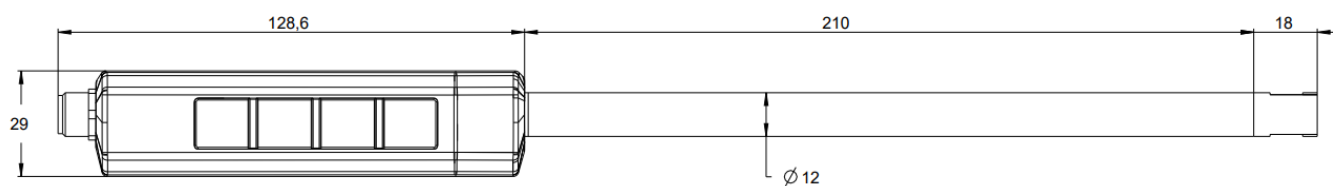

NIEUWKOOP

STANDARD ARTICLES

DX 970-L1 **Directional hotwire anemometer probe**, measuring range: 0.4 ... 20 m/s.
Incl. 1 m M12 connection cable. **Art no. 489347**

ACCESSORIES

CABLE-M12-L01 Connection cable M12 5 pole, 1 m **Art no. 487020**

CABLE-M12-L02 Connection cable M12 5 pole, 2 m **Art no. 487021**

CABLE-M12-L05 Connection cable M12 5 pole, 5 m **Art no. 487022**

SUITABLE INSTRUMENTS

PRO D01 1-channel handheld meter for digital probes. Supplied with 4 x AA alkaline batteries. **Art no. 486134**

PRO D05.2 2-channel handheld data logger for digital probes. Supplied with 4 NiMH rechargeable batteries, USB cable and software downloadable from Senseca website. **Art no. 486136**

PRO D05.3 3-channel handheld data logger for digital probes. Supplied with 4 NiMH rechargeable batteries, USB cable and software downloadable from Senseca website. **Art no. 486137**

PRO 921 Multifunctional handheld data logger for digital probes and 2 thermo couple probes Type K, Supplied with 4 x AA alkaline batteries **Art. No. 488743**

PRO 925 Multifunctional handheld handheld meter for digital probes and 2 thermo couple probes Type K
Supplied with 4 x AA alkaline batteries, USB cable and software downloadable from Senseca website. **Art. Nr. 488744**

More on www.senseca.com



NIEUWKOOP